

BEYOND  
FLOORING



**COMMERCIAL**

**Product catalogue  
2021**

LUXURY VINYL TILES

---



COMMERCIAL

“

We offer top-quality products,  
impeccable service,  
innovative, sustainable production  
and a proven track record...

But most of all,  
we love helping to  
achieve your goals.”

## About IVC Commercial

IVC Commercial is a global player in the design and manufacture of flooring solutions including Carpet Tiles, Luxury Vinyl Tiles (LVT) and Heterogeneous Vinyl for use in business, public and private environments.

As the commercial division of IVC Group, we're focused on improving the productivity and wellbeing of users in spaces through innovative solutions that are easy to implement and affordable. Accountable for our actions, we design and make floors responsibly in Europe, developing a circular approach to the future of flooring.

IVC Group is part of Mohawk Industries Inc., the world's largest flooring company. With 1,500 employees and 7 production sites in Europe, Russia and USA, IVC Group produces over 130,000,000m<sup>2</sup> of flooring every year.



Luxury Vinyl Tiles

## The Collection

### DRYBACK

**06**  
STUDIO MOODS

**14**  
MODULEO 55 HERRINGBONE

**16**  
MODULEO 55 EXPRESSIVE

**24**  
MODULEO 55 IMPRESSIVE

**30**  
MODULEO 55 WOODS

**36**  
MODULEO 55 TILES

**44**  
MODULEO 40

### LOOSE LAY

**50**  
MATRIX 70

### ENGINEERED CLICK (RIGID)

**52**  
LAYRED 55 IMPRESSIVE

**56**  
LAYRED 55

BEYOND  
FLOORING



# Studio Moods

## The quickest modular flooring solution

Our designers created a stunning Studio Moods programme. We selected 70 colours out of our Moduleo 55 Woods, Moduleo 55 Tiles and Moduleo 55 Impressive collections collections and started puzzling the nine shapes into more than 100 creative patterns. To design a completely exclusive and unique floor, fully personalised to your project, we offer you our Bespoke Creation (see page 12).

- Dryback
- 4 sided bevel
- 0.55mm wear layer
- 2.50mm total thickness

PATTERN 266  
 ◻ Mustang Slate 70998  
 ◻ Country Oak 54991

## Studio Moods / The Shapes






## Studio Moods / QuickShip Predefined Patterns

Our designers developed a **premium collection of Predefined Patterns**, to show you the endless possibilities of Studio Moods. Are you interested in creative, patterns that are still unique? Our QuickShip programme is available in **over 100 patterns**. Delivered in **just 10 business days**. All of the patterns have an easy order code to simplify the order request. You can also download files for your CAD/CAM software and order samples.

### PATTERN 417

- ◇ Desert Crayola 46772
- ◇ Cloud Stone 46854
- ◇ Jura Stone 46110

## Studio Moods / QuickShip Predefined Patterns

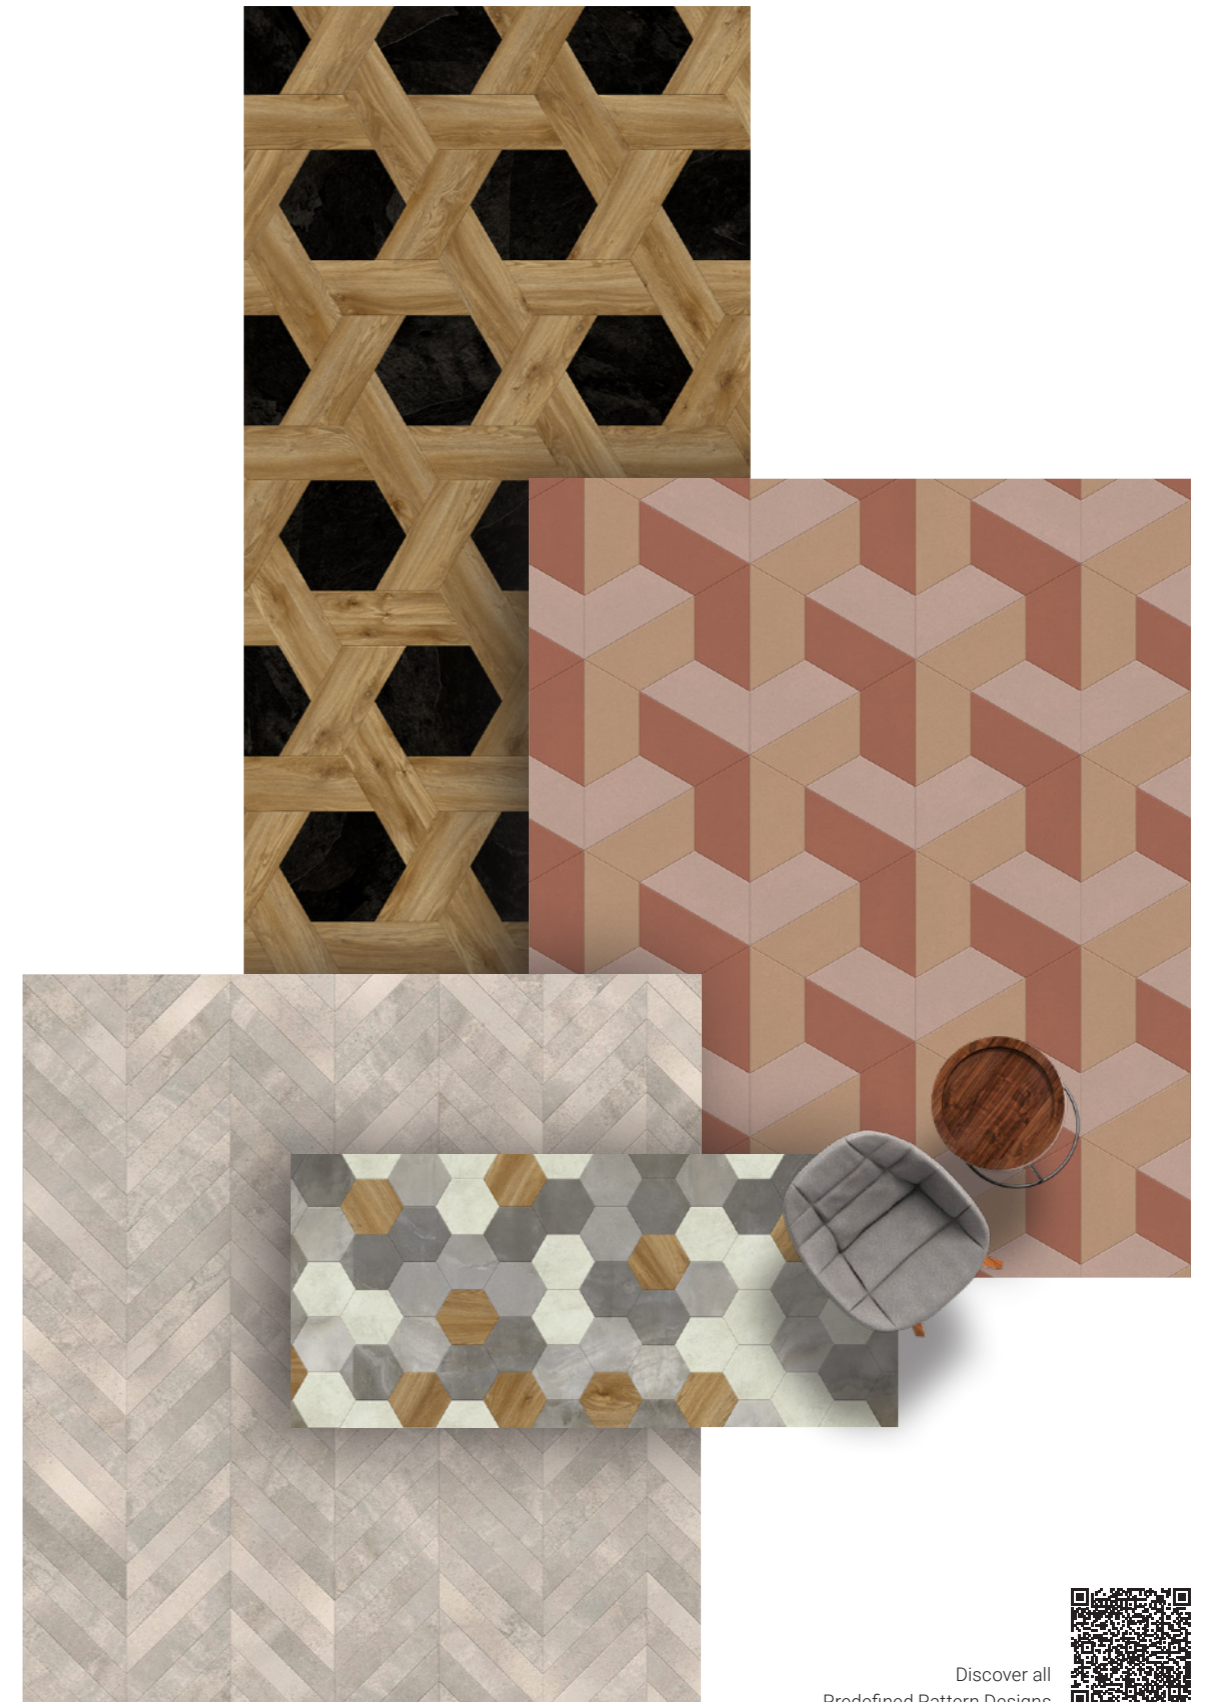





Discover all  
Predefined Pattern Designs

































































































## Studio Moods / QuickShip Building Blocks

All QuickShip patterns have been designed using the same 69 'Building Blocks'. This means that these 70 references can also be ordered separately, immediately from stock. Take advantage of the **delivery time of only 10 business days** and order without a **minimum order quantity**. On the next page you will find our complete selection of Building Blocks

-  Cloud Stone 46134
-  Desert Crayola 46454
-  Desert Crayola 46562
-  Desert Crayola 46533

### Studio Moods / QuickShip Building Blocks

|   | SMALL PLANK   | CHEVRON   | DIAMOND   | BIG DIAMOND   | TRAPEZOID   | TRIANGLE  | HEXAGON   | BIG HEXAGON   | PARALLELOGRAM   |
|---|---|---|---|---|---|---|---|---|---|
| <b>BLACKJACK OAK</b>  |   |   |   |   |   |   |   |   |   |
|  22220   |   |    |   |   |    |   |   |    |    |
|  22937   |   |    |   |   |    |   |   |    |    |
|  22229   |   |   |   |   |    |   |   |   |   |
| <b>COUNTRY OAK</b>  |   |   |   |   |   |   |   |   |   |
|  54991   |   |    |    |    |    |  |   |    |    |
| <b>SIERRA OAK</b>   |   |   |   |   |   |   |   |   |   |
|  58346   |   |    |    |    |    |  |    |    |    |
|  58876   |   |    |    |    |    |  |   |    |    |
| <b>CLOUD STONE</b>  |   |   |   |   |   |   |   |   |   |
|  46134   |   |    |   |   |   |   |   |    |   |
|  46244   |   |   |   |    |    |   |    |    |   |
|  46854   |   |   |   |    |   |   |    |   |   |
| <b>DESERT CRAYOLA</b>   |   |   |   |   |   |   |   |   |   |
|  46533 |  |   |  |   |  |   |  |   |   |
|  46454 |  |   |  |   |  |   |  |   |   |
|  46562 |  |   |  |   |  |   |  |   |   |
|  46616 |  |   |  |  |   |   |  |  |   |
|  46696 |  |   |  |   |   |   |  |  |   |
|  46772 |  |   |  |  |   |   |  |  |   |
| <b>JURA STONE</b>   |   |   |   |   |   |   |   |   |   |
|  46110 |   |   |   |  |   |   |  |   |   |
| <b>MUSTANG SLATE</b>  |   |   |   |   |   |   |   |   |   |
|  70928 |   |  |   |   |   |   |  |  |   |
|  70998 |   |  |   |   |   |   |  |  |  |




## Studio Moods / Bespoke Creation

△ Mysto 46921  
 △ Desert Stone 46210


In just **three steps** you can go wild with Studio Moods. **Puzzle nine shapes into different patterns and combine them with all our Moduleo 55 Woods, Moduleo 55 Tiles and Moduleo 55 Impressive collections.** Bespoke Creation is available from just 75m<sup>2</sup> and a lead time of four to six weeks. Check out all designs from page 18 up to page 37.

### Studio Moods / Bespoke Creation




## #01 Choose your shapes

Geometric shapes are the basic building blocks of a **creative Studio Moods floor.** There's a large variety of shapes available to choose from, from a simple rectangle to a sophisticated hexagon.

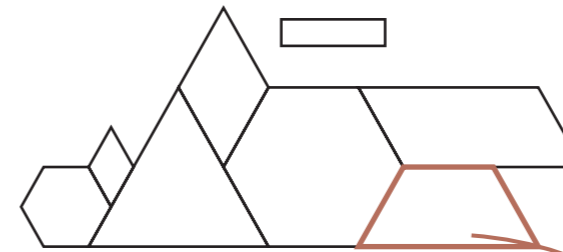

## #02 Design your own unique pattern

Build **your very own Studio Moods pattern** by forming a repetitive combination of one or more geometric shapes. By combining them with each other at different angles, you can create an infinite number of kaleidoscopic patterns.

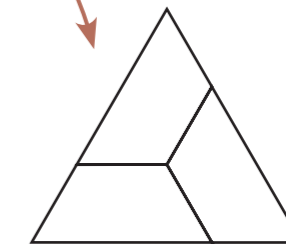

## #03 Fill in the colours

All **160 designs** from our Moduleo 55 Woods, Moduleo 55 Tiles and Moduleo 55 Impressive collections **can be used to fill in your pattern.** Choose timeless natural woods and stones or high-impact colours to bring your floor to life.





# Moduleo 55 Herringbone


BlackJack Oak 22229  
Country Oak 54991

- Dryback
- 4 sided bevel
- 0.55 mm wear layer
- 2.50 mm total thickness

## Moduleo 55 Herringbone



Country Oak 54991 LRV 7  
15,8 x 63,2 cm



Country Oak 54880 LRV 13  
15,8 x 63,2 cm




Sierra Oak 58876 LRV 13  
15,8 x 63,2 cm



Country Oak 54852 LRV 21  
15,8 x 63,2 cm



Laurel Oak 51824 LRV 28  
15,8 x 63,2 cm



Blackjack Oak 22229 LRV 29  
15,8 x 63,2 cm



Sierra Oak 58346 LRV 25  
15,8 x 63,2 cm



Laurel Oak 51822 LRV 19  
15,8 x 63,2 cm



Blackjack Oak 22220 LRV 32  
15,8 x 63,2 cm



Laurel Oak 51282 LRV 35  
15,8 x 63,2 cm




Laurel Oak 51329 LRV 45  
15,8 x 63,2 cm



Laurel Oak 51229 LRV 39  
15,8 x 63,2 cm



Blackjack Oak 22937 LRV 24  
15,8 x 63,2 cm



Laurel Oak 51937 LRV 31  
15,8 x 63,2 cm



Hoover Stone 46926 LRV 21  
15,8 x 63,2 cm



Laurel Oak 51942 LRV 26  
15,8 x 63,2 cm






# Moduleo 55 Expressive


Bohemian 61144

- Dryback
- Embossed in Register
- Cut in Register
- 0.55 mm wear layer
- 2.50 mm total thickness

## Moduleo 55 Expressive



**Bohemian 61974** LRV 9  
24,6 x 149,8 cm  
Bevel on the long side



**Bohemian 61264** LRV 43  
24,6 x 149,8 cm  
Bevel on the long side



**Bohemian 61254** LRV 47  
24,6 x 149,8 cm  
Bevel on the long side




**Bohemian 61144** LRV 52  
24,6 x 149,8 cm  
Bevel on the long side



Shades 62220

Moduleo 55 Expressive

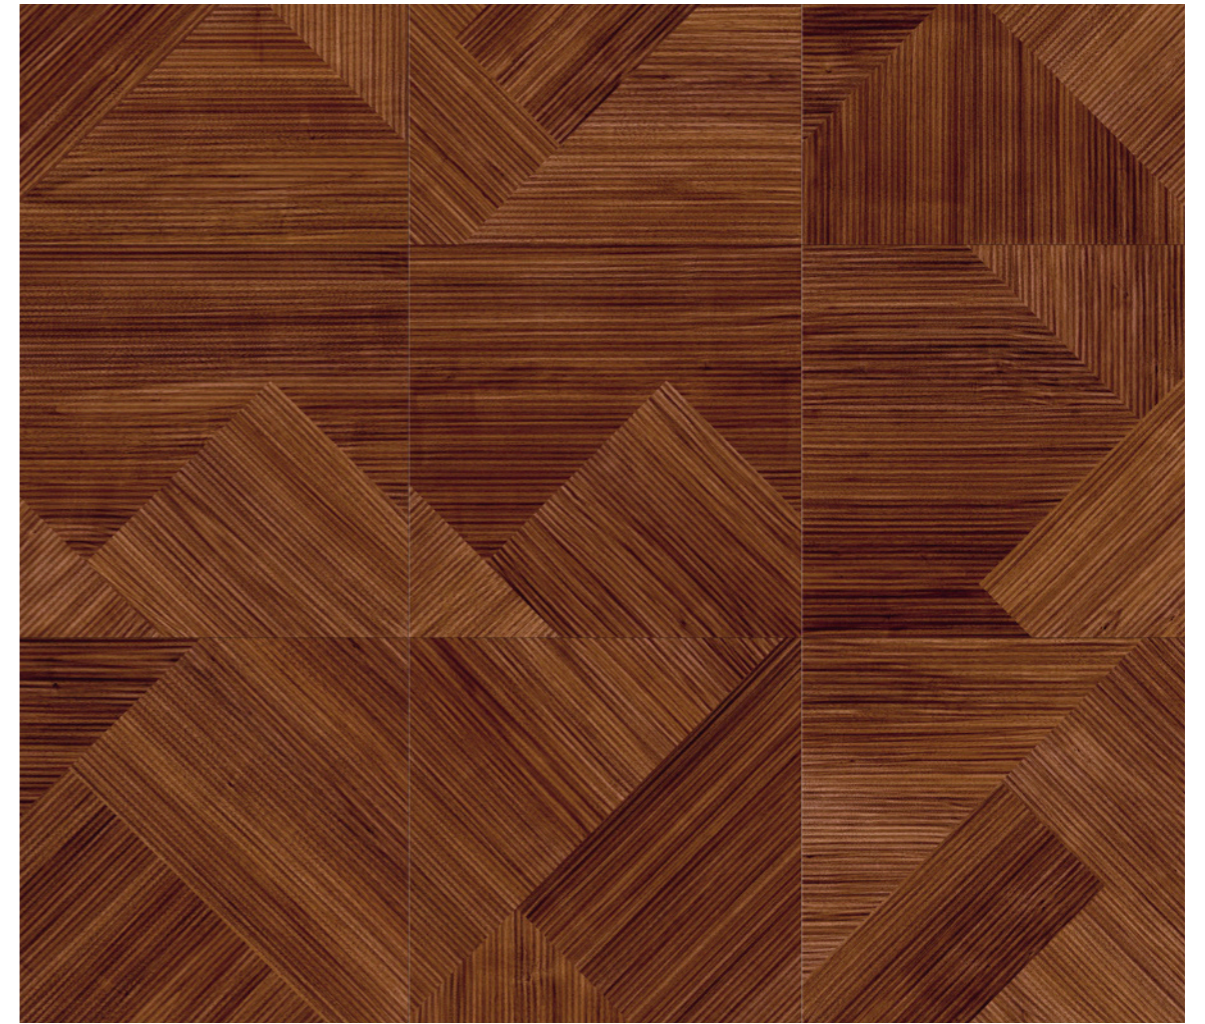

Shades 62990 LRV 6  
49,3 x 49,3 cm  
No bevel



Shades 62880 LRV 9  
49,3 x 49,3 cm  
No bevel




Shades 62220 LRV 30  
49,3 x 49,3 cm  
No bevel




Mystical 71967

**Moduleo 55 Expressive**

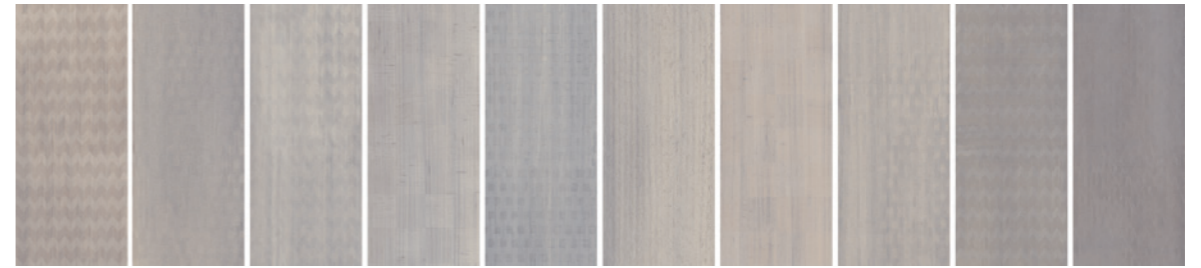


**Mystical 71247**  
Full design = 10 planks 19,6 x 132 cm  
4 sided bevel

LRV 25

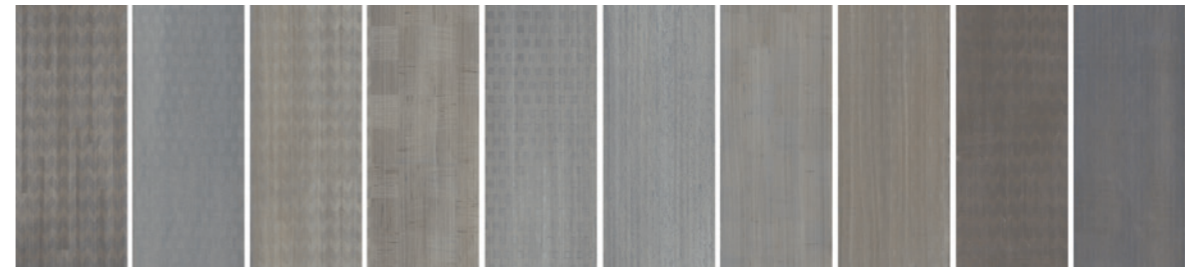


**Mystical 71937**  
Full design = 10 planks 19,6 x 132 cm  
4 sided bevel

LRV 30

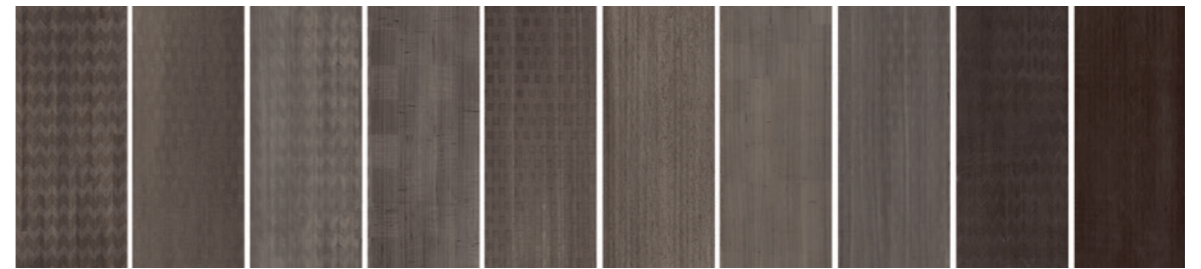

**Mystical 71857**  
Full design = 10 planks 19,6 x 132 cm  
4 sided bevel

LRV 16

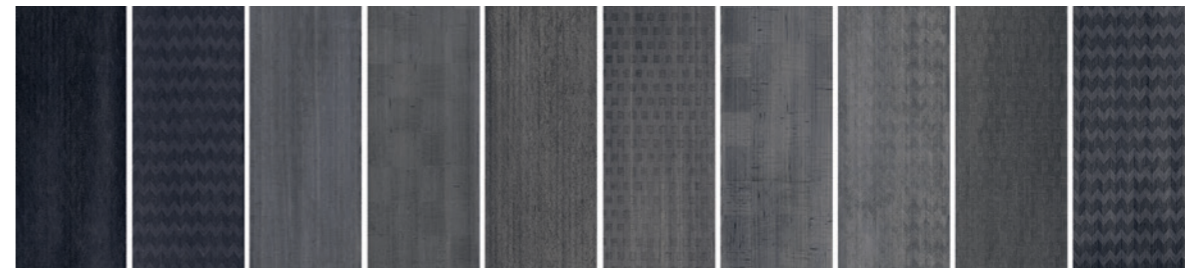


**Mystical 71967**  
Full design = 10 planks 19,6 x 132 cm  
4 sided bevel

LRV 8



○  
Jumble Stone 46140

**Moduleo 55 Expressive**

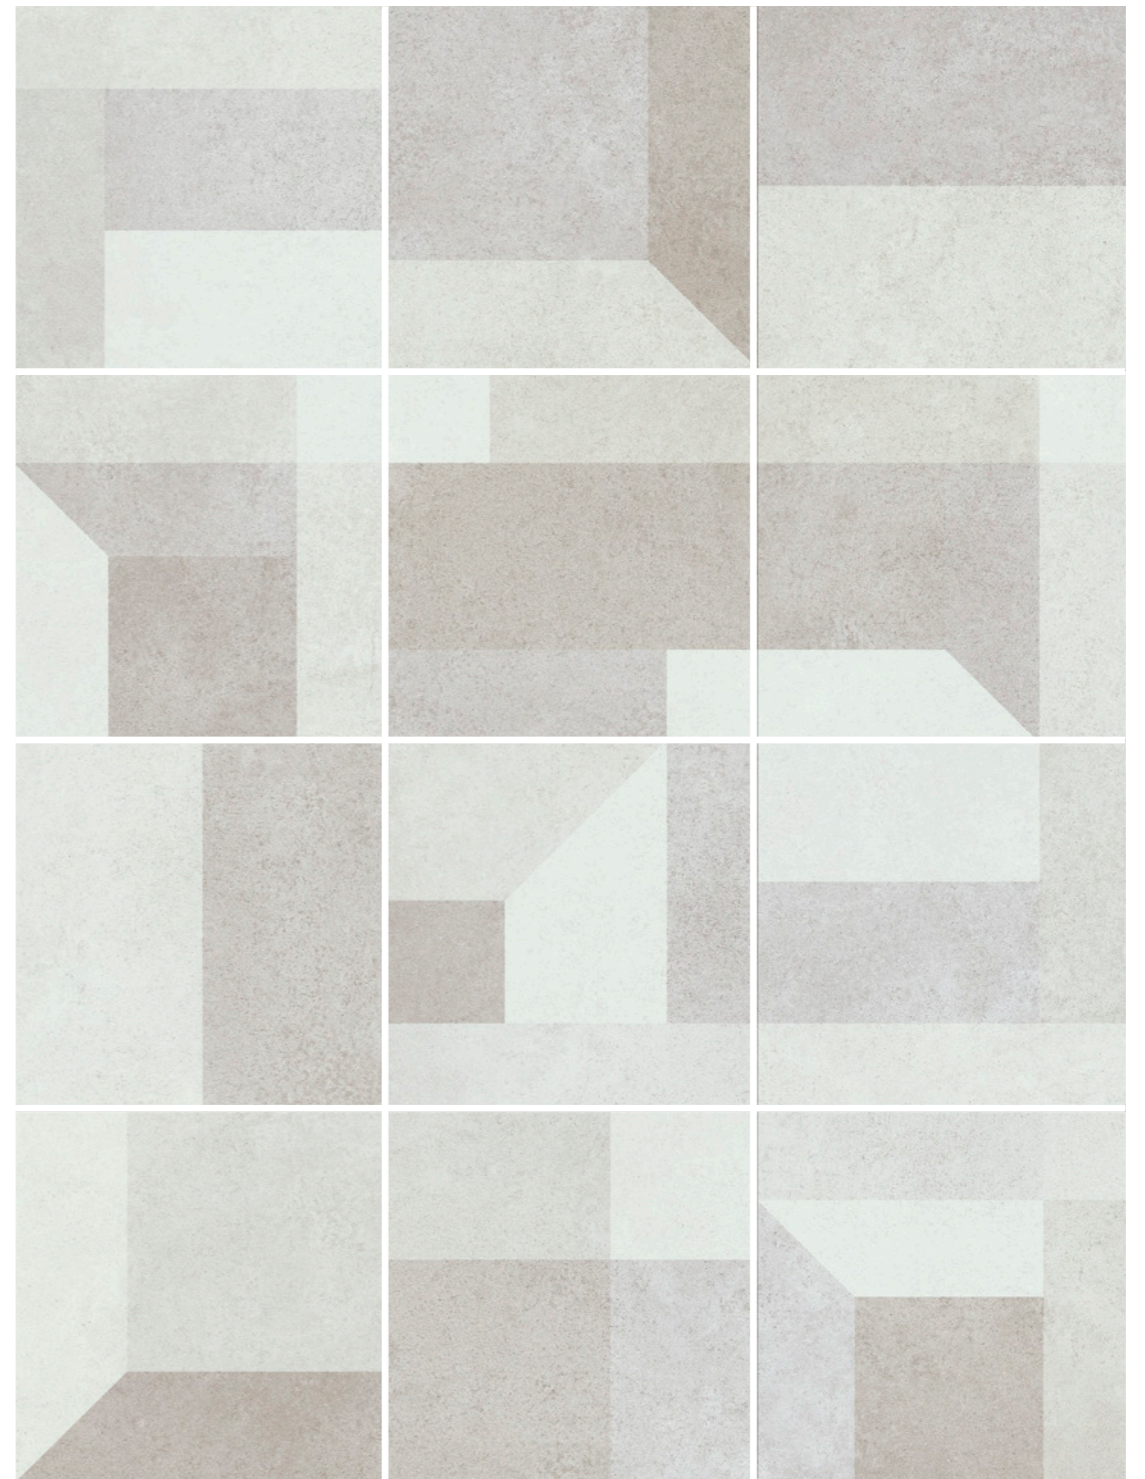

**Jumble Stone 46140**  
Full design = 12 tiles 49,3 x 49,3 cm  
4 sided bevel

LRV 41




# Moduleo 55 Impressive


Mustang Slate 70928

- Dryback
- Embossed in Register
- 4 sided bevel
- 0.55 mm wear layer
- 2.50 mm total thickness

## Moduleo 55 Impressive



**Mustang Slate 70928** LRV 18  
32,9 x 65,9 cm / 43,4 x 86,8 cm




**Mustang Slate 70948** LRV 10  
32,9 x 65,9 cm / 43,4 x 86,8 cm



**Mustang Slate 70968** LRV 8  
32,9 x 65,9 cm / 43,4 x 86,8 cm




**Mustang Slate 70998** LRV 6  
32,9 x 65,9 cm / 43,4 x 86,8 cm



**Laurel Oak 51852** LRV 13  
19,6 x 132 cm



**Santa Cruz Oak 59963** LRV 9  
19,6 x 132 cm



**Country Oak 54991** LRV 7  
19,6 x 132 cm  
\*Herringbone: 15,8 x 63,2 cm



**Laurel Oak 51992** LRV 6  
19,6 x 132 cm



**Country Oak 54880** LRV 13  
19,6 x 132 cm  
\*Herringbone: 15,8 x 63,2 cm



**Sierra Oak 58876** LRV 13  
19,6 x 132 cm / 21,4 x 149,8 cm  
\*Herringbone: 15,8 x 63,2 cm



**Mountain Oak 56870** LRV 16  
19,6 x 132 cm



**Country Oak 54852** LRV 21  
19,6 x 132 cm  
\*Herringbone: 15,8 x 63,2 cm





Sierra Oak 58346

Moduleo 55 Impressive

BEYOND  
FLOORING



**Laurel Oak 51329** LRV 45  
21,4 x 149,8 cm  
\*Herringbone: 15,8 x 63,2 cm



**Laurel Oak 51282** LRV 35  
149,4 x 20,9 cm  
\*Herringbone: 15,8 x 63,2 cm



**Laurel Oak 51824** LRV 28  
21,4 x 149,8 cm  
\*Herringbone: 15,8 x 63,2 cm



**Sierra Oak 58346** LRV 25  
19,6 x 132 cm / 21,4 x 149,8 cm  
\*Herringbone: 15,8 x 63,2 cm



**Laurel Oak 51262** LRV 21  
19,6 x 132 cm



**Mountain Oak 56440** LRV 27  
19,6 x 132 cm



**Laurel Oak 51822** LRV 19  
19,6 x 132 cm  
\*Herringbone: 15,8 x 63,2 cm



**Castle Oak 55236** LRV 35  
19,6 x 132 cm



**Mountain Oak 56230** LRV 33  
19,6 x 132 cm



**Laurel Oak 51332** LRV 34  
19,6 x 132 cm



**Santa Cruz Oak 59253** LRV 30  
19,6 x 132 cm



**Country Oak 54925** LRV 33  
19,6 x 132 cm



**Santa Cruz Oak 59143** LRV 44  
19,6 x 132 cm



**Sierra Oak 58226** LRV 37  
19,6 x 132 cm / 21,4 x 149,8 cm



**Country Oak 54225** LRV 38  
19,6 x 132 cm



\*Herringbone



○  
Castle Oak 55935

Moduleo 55 Impressive

BEYOND  
FLOORING



**Laurel Oak 51937** LRV 31  
21,4 x 149,8 cm  
\*Herringbone: 15,8 x 63,2 cm



**Castle Oak 55935** LRV 26  
19,6 x 132 cm



**Laurel Oak 51222** LRV 32  
19,6 x 132 cm



**Mountain Oak 56215** LRV 40  
19,6 x 132 cm



**Laurel Oak 51229** LRV 39  
21,4 x 149,8 cm  
\*Herringbone: 15,8 x 63,2 cm



**Castle Oak 55960** LRV 16  
19,6 x 132 cm



**Santa Cruz Oak 59823** LRV 23  
19,6 x 132 cm



**Mountain Oak 56938** LRV 36  
19,6 x 132 cm




**Sierra Oak 58956** LRV 20  
19,6 x 132 cm / 21,4 x 149,8 cm



**Laurel Oak 51942** LRV 26  
19,6 x 132 cm  
\*Herringbone: 15,8 x 63,2 cm



**Sierra Oak 58936** LRV 33  
19,6 x 132 cm / 21,4 x 149,8 cm



**Castle Oak 55152** LRV 57  
19,6 x 132 cm



**Laurel Oak 51102** LRV 61  
19,6 x 132 cm



\*Herringbone



## Moduleo 55 Woods

Country Oak 24456

- Dryback
- 4 sided bevel
- 0.55 mm wear layer
- 2.50 mm total thickness

### Moduleo 55 Woods



Verdon Oak 24984 LRV 9  
19,6 x 132 cm



Ethnic Wengé 28890 LRV 16  
19,6 x 132 cm



Mexican Ash 20875 LRV 14  
19,6 x 132 cm



Sherman Oak 22841 LRV 13  
19,6 x 132 cm / 21,4 x 149,8 cm



Latin Pine 24868 LRV 20  
19,6 x 132 cm



Baltic Maple 28884 LRV 15  
19,6 x 132 cm



Latin Pine 24874 LRV 16  
19,6 x 132 cm



Montreal Oak 24570 LRV 9  
19,6 x 132 cm




Blackjack Oak 22246 LRV 27  
19,6 x 132 cm



Mexican Ash 20245 LRV 28  
19,6 x 132 cm



Ethnic Wengé 28282 LRV 27  
19,6 x 132 cm



Chester Oak 24838 LRV 17  
19,6 x 132 cm



Country Oak 24432 LRV 32  
19,6 x 132 cm



Country Oak 24456 LRV 18  
19,6 x 132 cm



Montreal Oak 24825 LRV 20  
19,6 x 132 cm



Persian Walnut 20444 LRV 14  
19,6 x 132 cm





○  
Sherman Oak 22232

Moduleo 55 Woods

BEYOND  
FLOORING



**Classic Oak 24438** LRV 24  
19,6 x 132 cm




**Classic Oak 24235** LRV 28  
19,6 x 132 cm



**Chester Oak 24418** LRV 38  
19,6 x 132 cm



**Sherman Oak 22232** LRV 33  
19,6 x 132 cm / 21,4 x 149,8 cm



**Blackjack Oak 22220** LRV 32  
19,6 x 132 cm  
\*Herringbone: 15,8 x 63,2 cm



**Blackjack Oak 22229** LRV 29  
19,6 x 132 cm  
\*Herringbone: 15,8 x 63,2 cm



**Classic Oak 24234** LRV 33  
19,6 x 132 cm



**Verdon Oak 24280** LRV 28  
19,6 x 132 cm



**Baltic Maple 28230** LRV 37  
19,6 x 132 cm



**Chester Oak 24229** LRV 34  
19,6 x 132 cm



**Sherman Oak 22221** LRV 43  
19,6 x 132 cm / 21,4 x 149,8 cm



**Blackjack Oak 22215** LRV 45  
19,6 x 132 cm



\*Herringbone



Verdon Oak 24232

Moduleo 55 Woods

BEYOND  
FLOORING



Verdon Oak 24232 LRV 38  
19,6 x 132 cm



Latin Pine 24242 LRV 43  
19,6 x 132 cm



Ethnic Wengé 28160 LRV 45  
19,6 x 132 cm



Verdon Oak 24117 LRV 49  
19,6 x 132 cm



Verdon Oak 24936 LRV 35  
19,6 x 132 cm



Sherman Oak 22941 LRV 28  
19,6 x 132 cm / 21,4 x 149,8 cm



Sherman Oak 22911 LRV 45  
19,6 x 132 cm / 21,4 x 149,8 cm



Chester Oak 24948 LRV 39  
19,6 x 132 cm



Fazino Maple 28920 LRV 26  
19,6 x 132 cm



Verdon Oak 24962 LRV 16  
19,6 x 132 cm



Mexican Ash 20965 LRV 22  
19,6 x 132 cm



Blackjack Oak 22937 LRV 24  
19,6 x 132 cm  
\*Herringbone: 15,8 x 63,2 cm

  
\*Herringbone



# Moduleo 55 Tiles

Mysto 46164

- Dryback
- 4 sided bevel
- 0.55 mm wear layer
- 2.50 mm total thickness

## Moduleo 55 Tiles



**Desert Stone 46210** LRV 60  
32,9 x 65,9 cm / 43,4 x 86,8 cm



**Jura Stone 46110** LRV 63  
32,9 x 65,9 cm



**Jura Stone 46191** LRV 48  
32,9 x 65,9 cm




**Jersey Stone 46156** LRV 62  
32,9 x 65,9 cm



**River Wood 46137** LRV 53  
32,9 x 65,9 cm




**Azuriet 46148** LRV 58  
32,9 x 65,9 cm  
Glitter effect




**Mysto 46164** LRV 54  
49,3 x 49,3 cm



**Cloud Stone 46134** LRV 35  
60,96 x 60,96 cm




**Ceppo 46151** LRV 37  
60,96 x 60,96 cm



**Mysto 46921** LRV 29  
49,3 x 49,3 cm



**Azuriet 46985** LRV 10  
32,9 x 65,9 cm  
Glitter effect



**Jersey Stone 46976** LRV 8  
32,9 x 65,9 cm



**Hoover Stone 46979** LRV 9  
32,9 x 65,9 cm / 60,96 x 60,96 cm



**River Wood 46993** LRV 7  
32,9 x 65,9 cm



Hoover Stone 46957

Moduleo 55 Tiles


BEYOND  
FLOORING



Jura Stone 46975 LRV 11  
32,9 x 65,9 cm




Concrete 40986 LRV 15  
32,9 x 65,9 cm



Desert Stone 46950 LRV 22  
32,9 x 65,9 cm / 43,4 x 86,8 cm




Steelrock 46940 LRV 25  
32,9 x 65,9 cm  
Metal effect




Azuriet 46959 LRV 22  
32,9 x 65,9 cm  
Glitter effect



Hoover Stone 46957 LRV 14  
32,9 x 65,9 cm / 60,96 x 60,96 cm




Brushed Metal 20950 LRV 33  
32,9 x 65,9 cm  
Metal effect



Ceppo 46961 LRV 18  
60,96 x 60,96 cm



Hoover Stone 46926 LRV 21  
32,9 x 65,9 cm / 60,96 x 60,96 cm  
\*Herringbone: 15,8 x 63,2 cm



Mysto 46946 LRV 17  
49,3 x 49,3 cm



Jura Stone 46956 LRV 19  
32,9 x 65,9 cm



Desert Stone 46970 LRV 15  
32,9 x 65,9 cm / 43,4 x 86,8 cm



Azuriet 46860 LRV 22  
32,9 x 65,9 cm  
Glitter effect



Cloud Stone 46854 LRV 21  
60,96 x 60,96 cm

  
\*Herringbone




○  
Ceppo 46921

Moduleo 55 Tiles


BEYOND  
FLOORING




**Concrete 40876** LRV 34  
32,9 x 65,9 cm



**Desert Stone 46920** LRV 36  
32,9 x 65,9 cm / 43,4 x 86,8 cm



**Desert Stone 46915** LRV 42  
32,9 x 65,9 cm / 43,4 x 86,8 cm



**Azuriet 46939** LRV 37  
32,9 x 65,9 cm  
Glitter effect



**Azuriet 46919** LRV 48  
32,9 x 65,9 cm  
Glitter effect




**Hoover Stone 46916** LRV 31  
32,9 x 65,9 cm / 60,96 x 60,96 cm




**Jura Stone 46960** LRV 26  
32,9 x 65,9 cm



**Concrete 40945** LRV 39  
32,9 x 65,9 cm



**Jersey Stone 46913** LRV 37  
32,9 x 65,9 cm



**Ceppo 46921** LRV 31  
60,96 x 60,96 cm



**Steelrock 46234** LRV 36  
32,9 x 65,9 cm  
Metal effect



**Cloud Stone 46244** LRV 36  
60,96 x 60,96 cm



**Brushed Metal 20830** LRV 35  
32,9 x 65,9 cm  
Metal effect



**Jura Stone 46935** LRV 38  
32,9 x 65,9 cm



**Jura Stone 46820** LRV 36  
32,9 x 65,9 cm




Desert Crayola 46533-46562-46616-46696

Moduleo 55 Tiles


BEYOND  
FLOORING



Jura Stone 46214 LRV 35  
32,9 x 65,9 cm



Desert Crayola 46454 LRV 27  
32,9 x 65,9 cm



Desert Crayola 46562 LRV 20  
32,9 x 65,9 cm



Steelrock 46832 LRV 20  
32,9 x 65,9 cm  
Metal effect



River Wood 46882 LRV 20  
32,9 x 65,9 cm



Desert Crayola 46533 LRV 34  
32,9 x 65,9 cm



Desert Crayola 46616 LRV 47  
32,9 x 65,9 cm



Desert Crayola 46772 LRV 16  
32,9 x 65,9 cm



Desert Crayola 46696 LRV 13  
32,9 x 65,9 cm



# Moduleo 40

○  
Classic Oak 24837-24980

## Moduleo 40



**Classic Oak 24980** LRV 9  
19,6 x 132 cm



**Country Oak 24892** LRV 16  
19,6 x 132 cm



**Country Oak 24958** LRV 21  
19,6 x 132 cm



**Classic Oak 24864** LRV 26  
19,6 x 132 cm



**Midland Oak 22821** LRV 23  
19,6 x 132 cm



**Classic Oak 24844** LRV 23  
19,6 x 132 cm



**Country Oak 24842** LRV 33  
19,6 x 132 cm



**Brio Oak 22877** LRV 16  
19,6 x 132 cm



**Classic Oak 24837** LRV 27  
19,6 x 132 cm



**Country Oak 24277** LRV 28  
19,6 x 132 cm



**Midland Oak 22231** LRV 32  
19,6 x 132 cm



**Brio Oak 22247** LRV 42  
19,6 x 132 cm

- Dryback
- 4 sided bevel
- 0.40 mm wear layer
- 2.35 mm total thickness



○  
Classic Oak 24932

Moduleo 40

BEYOND  
FLOORING



**Midland Oak 22240** LRV 36  
19,6 x 132 cm



**Brio Oak 22237** LRV 46  
19,6 x 132 cm



**Country Oak 24918** LRV 34  
19,6 x 132 cm



**Classic Oak 24228** LRV 43  
19,6 x 132 cm



**Country Oak 24130** LRV 45  
19,6 x 132 cm



**Midland Oak 22110** LRV 51  
19,6 x 132 cm



**Classic Oak 24125** LRV 45  
19,6 x 132 cm



**Classic Oak 24932** LRV 27  
19,6 x 132 cm



**Brio Oak 22927** LRV 24  
19,6 x 132 cm



**Brio Oak 22917** LRV 32  
19,6 x 132 cm



**Midland Oak 22929** LRV 32  
19,6 x 132 cm






Cantera 46930

Moduleo 40

BEYOND  
FLOORING



Venetian Stone 46981 LRV 8  
32,9 x 65,9 cm



Cantera 46990 LRV 10  
32,9 x 65,9 cm



Jetstone 46982 LRV 25  
32,9 x 65,9 cm



Venetian Stone 46949 LRV 28  
32,9 x 65,9 cm



Cantera 46930 LRV 28  
32,9 x 65,9 cm



Jetstone 46942 LRV 38  
32,9 x 65,9 cm



Venetian Stone 46931 LRV 50  
32,9 x 65,9 cm



Venetian Stone 46111 LRV 68  
32,9 x 65,9 cm



# Matrix 70

Swedish Pine 2965

- Loose Lay
- 0.70 mm wear layer
- 5 mm total thickness

## Matrix 70 Loose Lay



**Swedish Pine 2965** LRV 10  
17,78 x 121,92 cm



**European Oak 2870** LRV 13  
17,78 x 121,92 cm




**Traditional Oak 1866** LRV 16  
17,78 x 121,92 cm



**Traditional Oak 1832** LRV 25  
17,78 x 121,92 cm



**European Oak 2951** LRV 28  
17,78 x 121,92 cm



**Swedish Pine 2242** LRV 38  
17,78 x 121,92 cm



**Riviera Oak 1240** LRV 35  
17,78 x 121,92 cm



**Traditional Oak 1826** LRV 23  
17,78 x 121,92 cm




**Riviera Oak 1952** LRV 29  
17,78 x 121,92 cm



**Chrome 7992** LRV 9  
45,72 x 91,44 cm



**Weaves 8853** LRV 12  
50 x 50 cm



**Weaves 8952** LRV 17  
50 x 50 cm




**Ceramic 4945** LRV 14  
50 x 50 cm / 45,72 x 91,44 cm



**Ceramic 4970** LRV 18  
50 x 50 cm / 45,72 x 91,44 cm



**Chrome 7972** LRV 22  
45,72 x 91,44 cm



**Ceramic 4968** LRV 22  
50 x 50 cm / 45,72 x 91,44 cm




# LayRed 55 Impressive

Country Oak 54991

- Engineered vinyl click
- Embossed in Register
- 4 sided bevel
- 0.55 mm wear layer
- 6 mm total thickness
- Integrated underlay

## LayRed 55 Impressive



**Country Oak 54991** LRV 6  
20,9 cm x 149,4cm



**Laurel Oak 51992** LRV 6  
149,4 x 20,9 cm



**Country Oak 54875** LRV 14  
20,9 cm x 149,4cm



**Laurel Oak 51864** LRV 11  
149,4 x 20,9 cm



**Mountain Oak 56869** LRV 21  
149,4 x 20,9 cm



**Country Oak 54945** LRV 18  
20,9 cm x 149,4cm




**Country Oak 54935** LRV 31  
20,9 cm x 149,4cm



**Laurel Oak 51914** LRV 39  
149,4 x 20,9 cm



**Sierra Oak 58933** LRV 41  
20,9 cm x 149,4cm



**Mountain Oak 56213** LRV 46  
149,4 x 20,9 cm



**Laurel Oak 51104** LRV 59  
149,4 x 20,9 cm



**Mountain Oak 56112** LRV 46  
149,4 x 20,9 cm



○  
Laurel Oak 51230

LayRed 55 Impressive

BEYOND  
FLOORING



**Mountain Oak 56238** LRV 40  
149,4 x 20,9 cm



**Sierra Oak 58239** LRV 31  
20,9 cm x 149,4cm



**Country Oak 54285** LRV 38  
20,9 cm x 149,4cm




**Sierra Oak 58228** LRV 45  
19,6 x 132 cm / 21,4 x 149,8 cm



**Sierra Oak 58268** LRV 37  
19,6 x 132 cm / 21,4 x 149,8 cm



**Laurel Oak 51230** LRV 41  
149,4 x 20,9 cm



**Mountain Oak 56220** LRV 37  
149,4 x 20,9 cm



**Country Oak 54265** LRV 42  
20,9 cm x 149,4cm



**Sierra Oak 58847** LRV 31  
19,6 x 132 cm / 21,4 x 149,8 cm



**Mountain Oak 56275** LRV 32  
149,4 x 20,9 cm



**Laurel Oak 51282** LRV 34  
149,4 x 20,9 cm



**Sierra Oak 58248** LRV 43  
19,6 x 132 cm / 21,4 x 149,8 cm



# LayRed 55

Verdon Oak 24232

- Engineered vinyl click
- 4 sided bevel
- 0.55 mm wear layer
- 6 mm total thickness
- Integrated underlay

## LayRed 55



Country Oak 24991 LRV 7  
131,7 x 18,9 cm



Country Oak 24456 LRV 18  
131,7 x 18,9 cm



Sherman Oak 22941 LRV 28  
131,7 x 18,9 cm



Blackjack Oak 22937 LRV 24  
131,7 x 18,9 cm



Verdon Oak 24962 LRV 16  
131,7 x 18,9 cm



Sherman Oak 22841 LRV 13  
131,7 x 18,9 cm



Verdon Oak 24232 LRV 38  
131,7 x 18,9 cm



Blackjack Oak 22246 LRV 27  
131,7 x 18,9 cm



Classic Oak 24234 LRV 33  
131,7 x 18,9 cm



Classic Oak 24235 LRV 28  
131,7 x 18,9 cm



Sherman Oak 22221 LRV 43  
131,7 x 18,9 cm



Blackjack Oak 22215 LRV 45  
131,7 x 18,9 cm



Blackjack Oak 22220 LRV 32  
131,7 x 18,9 cm




Sherman Oak 22232 LRV 33  
131,7 x 18,9 cm




Desert Stone 46915

LayRed 55

BEYOND  
FLOORING



Jersey Stone 46976 LRV 8  
61,0 x 30,3 cm



Jersey Stone 46913 LRV 37  
61,0 x 30,3 cm



Hoover Stone 46916 LRV 31  
61,0 x 30,3 cm



Hoover Stone 46269 LRV 31  
61,0 x 30,3 cm



Desert Stone 46970 LRV 15  
61,0 x 30,3 cm



Jersey Stone 46156 LRV 62  
61,0 x 30,3 cm



Desert Stone 46915 LRV 42  
61,0 x 30,3 cm




Desert Stone 46950 LRV 22  
61,0 x 30,3 cm



Hoover Stone 46957 LRV 14  
61,0 x 30,3 cm


# Why choose LVT?

Our unique production process and smart use of cutting-edge technologies result in a floor that's durable, easy to maintain and natural looking.

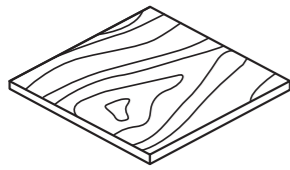


### Original look and feel

We select only the most original looks and rely on an extensive range of realistic structures. Our water-based printing technique, with a very fine dot screen, makes it hard to discern our authentic designs from real wood or genuine stone. And it doesn't stop there; we use large cylinders to minimise pattern repeat, allowing us to cover up to 25m<sup>2</sup> without any duplication. Lastly, we add a V-groove on four sides of each plank or tile, resulting in an even more true-to-nature look.

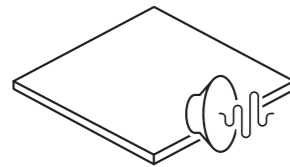

### The perfect indoor environment

Our indoor air quality far exceeds legal requirements, achieving numerous international certifications: ISO 9001, ISO 14001, indoor air quality A+, BRE A+, to name just a few. Additionally, compatible with underfloor heating and reduces walking sound more than other types of floor. It offers ergonomic support, has great acoustic qualities and is warm underfoot, providing an all-round enjoyable atmosphere for any indoor space.

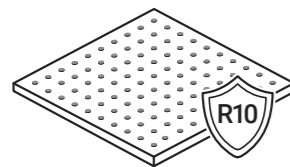

### Performance you can trust

Although the designs may sweep you off your feet, their slip-resistant surface sure won't. Floors pass the industry accepted pendulum test and ramp test for slip resistance with flying colours – almost all are R10 classified. What's more, a water-resistant wear layer makes the floors easy to maintain and protects it from stains and scratches.



## The LVT technology

A function for every layer

Meet our patented Surface Layer Complex: a multi-layer construction fused into a single, super-strong whole, with a wear layer and lacquer. This robust bind between layers thanks to our composition process technology has numerous assets: acoustic comfort, water resistance and dimensional stability through glass-fibre reinforcement, to name a few. The wear layer is perfectly suited for high traffic commercial applications. Finally, every floor is protected by Protectonite® PU, safeguarding it from scratches and stains.

## Discover our LVT collections

Our LVT collections reflect the unique patterns and textures found in nature, and offer distinctive abstract looks to explore. At the same time, they guarantee the easy installation and maintenance of luxury vinyl floors. The abundance of designs to choose from – oak, concrete, tropical shades and mystical textiles are just a few – give you the freedom to create truly unique spaces. With the LVT collection, we've even adapted the shape of our planks to bring something extra to your project. Whether triangular or octagonal, we'll make them for you. Browse our other collections at [www.ivc-commercial.com](http://www.ivc-commercial.com).





## Endless combinations, infinite possibilities

IVC's broad range of LVT allows you to create unique floors that light up every room. But the ultimate way to take your project's floor to new heights is by combining different products for one special look. That's why we offer a variety of heterogeneous vinyl and carpet tiles that can be easily mixed and matched with your favourite LVT floor.



“

Our broad portfolio of 100% in-house designed Carpet Tiles, Luxury Vinyl Tiles and Heterogeneous Vinyl undoubtedly holds the key for your project.


What's more, you can combine our Luxury Vinyl Tiles, Heterogeneous Vinyl and Carpet Tiles to create a layout that works for your space.”



## Carpet Tiles

Unique colours that last a lifetime

Our carpet tiles are the solution for a truly unique floor that complements the spaces you design. Mix and match shades, or create your own personalised look. The nylon yarn we use is solution-dyed, giving our carpet tiles lasting stain and fade resistance. Even better, the trilobal shape of the yarn makes colours pop and ensures our carpet tiles reflect light and hide dirt.

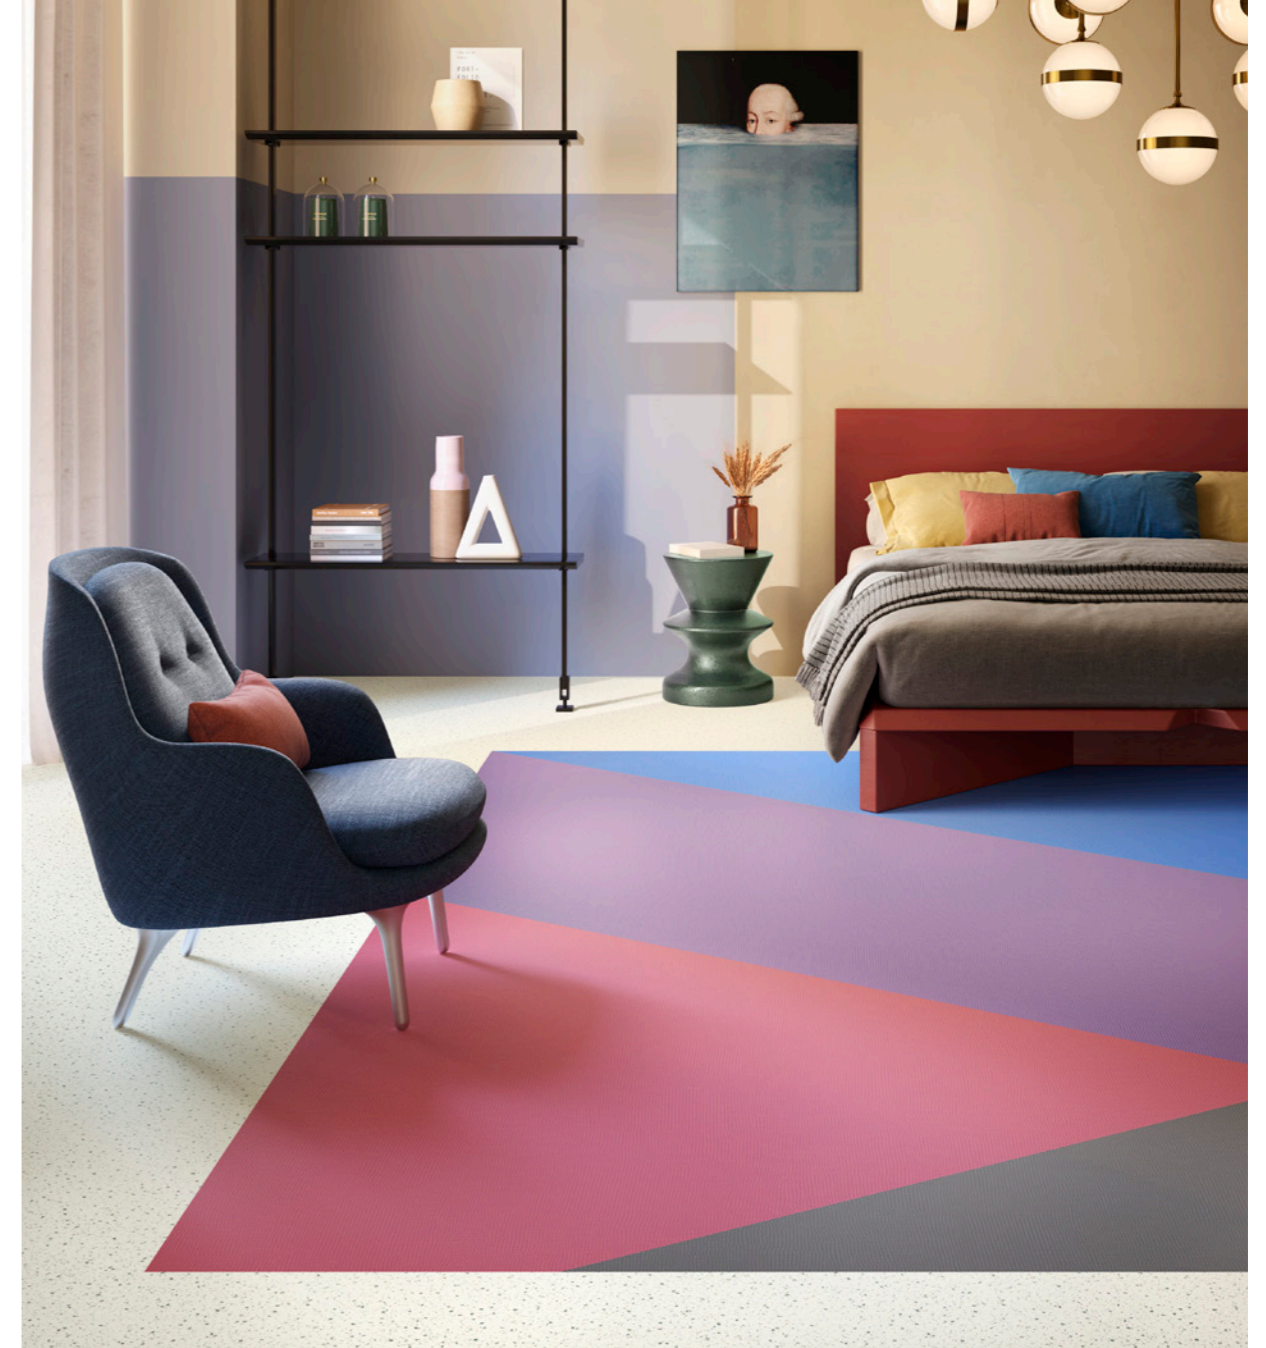

## Heterogeneous Vinyl

Easy, durable, versatile

Our sheet vinyl collections are the solution for a stunning floor that's easy to install and maintain. Use them for all your projects; retail, offices, day care centres, social housing, and even schools. Wet jackets, muddy shoes and noisy students are no problem; our heterogeneous vinyl is at the top of its class when it comes to durability, hygiene and acoustic performance.



## Flex Pro Underlay

The innovative, self-adhesive Flex Pro underlay is the perfect match for IVC LVT floors. It makes the installation process a breeze, saving time and money. Uninstalling the floor is easy as well, and doesn't damage your subfloor. What's more, waiting for the glue to harden is a thing of the past; simply walk on the floor as soon as it's installed.



## Accessories

Smart flooring solutions to ease your mind

Finding the right floor for your project is one thing, but installing, finishing and maintaining it can also be a fraught process. We've thought of everything to help make these steps easier. Whether you're looking for matching high-quality skirting boards, the right underlay, durable profiles and other installation products; we have the solution. [www.ivc-commercial.com](http://www.ivc-commercial.com)

## FlexLok

The innovative FlexLok system is the ideal alternative to traditional adhesive installation methods. The odorless dry technique virtually eliminates harmful VOCs and can be used on all underlays. Rely on FlexLok for a fast, easy installation of flexible, floating floors, without any glue. Moreover, the FlexLok system is Declare, HPD & DRI Green label certified.



**FLEXLOK**

# Future-proof, for you and for the planet

At IVC Group, we truly believe in products that are developed with the future in mind. That's why we take the time to pause and reflect on the impacts of our entire strategy and operation. But we also realise that actions speak louder than words, so here's how we raise the industry standard for sustainability, day after day.

“

Through our certified processes, skilled and inspired people and product portfolio that combines good value and corporate social responsibility, we really make the difference, for you and for the planet.”

- Through resource conservation and waste reduction, we minimise the environmental impact of our manufacturing and distribution operations.
- Our energy-efficient flooring plants are among the leanest and greenest in their class.
- To get our products to you, inland waterways are the logical choice.
- We invest in clean-air technology and cutting-edge manufacturing methods.
- We use as many recycled or renewable materials as possible – think of eco-friendly inks and recycled PVC.
- We hold all suppliers accountable for ensuring that products are made in a responsible manner – one that respects both labour and environment.



## Get in touch

Want to learn more about IVC Commercial's flooring solutions, or need help tackling an exciting project? We've got you covered.

Go to [ivc-commercial.com](http://ivc-commercial.com) to browse our collections, order samples, download inspirational brochures or stop by one of our showrooms. You can also make an appointment with our dedicated team by sending us an email via [info@ivc-commercial.com](mailto:info@ivc-commercial.com). Get in touch!

Follow us on     



BEYOND  
FLOORING

## Technical Specifications

Spécifications techniques - Technische specificaties - Technische Specificationen

|   |                                |
|---|--------------------------------|
| <b>Level of use</b> / Classe d'usage - Gebruiksklasse - Eignungsklasse  | EN ISO 10874                   |
| <b>Total thickness</b> / Epaisseur totale - Totale dikte - Gesamtdicke  | EN ISO 24346                   |
| <b>Wear layer</b> / Couche d'usure - Slijtlaag - Nuttschicht  | EN ISO 24340                   |
| <b>Wear layer PUR treatment</b> / Traitement polyurethane - PUR slijtlaag behandeling - Schutz vor Schmutz PUR                                | -                              |
| <b>Total weight g/m<sup>2</sup></b> / Poids total g/m <sup>2</sup> - Totaal gewicht g/m <sup>2</sup> - Flächengewicht g/m <sup>2</sup>        | EN ISO 23997                   |
| <b>Embossed in register</b> / Grainage en rapport - Register embossing - Synchronprägung  | -                              |
| <b>Planks A</b> / Lames A - Planken A - Dielen A  | EN ISO 24342                   |
| <b>Planks B</b> / Lames B - Planken B - Dielen B  | EN ISO 24342                   |
| <b>Planks C</b> / Lames C - Planken C - Dielen C  | EN ISO 24342                   |
| <b>Tiles A</b> / Dalles A - Tegels A - Fliesen A  | EN ISO 24342                   |
| <b>Tiles B</b> / Dalles B - Tegels B - Fliesen B  | EN ISO 24342                   |
| <b>Tiles C</b> / Dalles C - Tegels C - Fliesen C  | EN ISO 24342                   |
| <b>Tiles D</b> / Dalles D - Tegels D - Fliesen D  | EN ISO 24342                   |
| <b>Box planks A</b> / Boîte de lames A - Doos planken A - Ein Karton Dielen A   | -                              |
| <b>Box planks B</b> / Boîte de lames B - Doos planken B - Ein Karton Dielen B   | -                              |
| <b>Box planks C</b> / Boîte de lames C - Doos planken C - Ein Karton Dielen C   | -                              |
| <b>Box tiles A</b> / Boîte de dalles A - Doos tegels A - Ein Karton Fliesen A   | -                              |
| <b>Box tiles B</b> / Boîte de dalles B - Doos tegels B - Ein Karton Fliesen B   | -                              |
| <b>Box tiles C</b> / Boîte de dalles C - Doos tegels C - Ein Karton Fliesen C   | -                              |
| <b>Box tiles D</b> / Boîte de dalles D - Doos tegels D - Ein Karton Fliesen D   | -                              |
| <b>Inflammability</b> / Classement feu - Brandklasse - Brandverhalten   | EN 13501                       |
| <b>Scratch resistance</b> / Résistance aux rayures - Kravastheid - Verschleißverhalten  | EN ISO 660-2                   |
| <b>Squareness &amp; straightness</b> / Rectitude des arrêtes et de l'équerrage - Rechtheid & rechthoekigheid - Maßstabilität                  | EN ISO 24342                   |
| <b>Slip resistance</b> / Glissance - Antislip - Rutschfest  | EN 13893                       |
| <b>Slip restraint</b> / Résistance au glissement - Slipweerstand - Rutschhemmung  | DIN 51130                      |
| <b>Residual indentation</b> / Poinçonnement rémanent - Restindruk - Eindrückverhalten   | EN ISO 24343-1                 |
| <b>average measured value</b> / valeur moyenne mesurée - gemiddelde gemeten waarde - durchschnittlich gemessener Wert                         |                                |
| <b>Furniture leg resistance</b> / Résistance au pied du meuble - Meubelpoottest - Möbelschubtest  | EN ISO 16581                   |
| <b>Curling</b> / Incurvation - Krulling - Schüsselung   | EN ISO 23999                   |
| <b>Electrical resistance</b> / Résistance électrique - Elektrische weerstand - Elektrischer Widerstand  | EN 1081                        |
| <b>Dimensional stability</b> / Stabilité dimensionnelle - Dimensionele stabiliteit - Massänderung   | EN ISO 23999                   |
| <b>Heat insulation</b> / Isolation thermique - Thermische isolatie - Wärmeleitfähigkeit   | EN ISO 10456                   |
| <b>Thermal resistance R</b> / Résistance thermique R - Warmtedoorlaatweerstand R - Wärmedurchlasswiderstand R                                 | EN 12664                       |
| <b>Electrostatic performance</b> / Accumulation de charges électrostatiques - Electrostatische propensiteit - Antistatik                      | EN 1815                        |
| <b>Formaldehyde group</b> / Classe formaldéhyde - Formaldehydekategorie - Formaldehyd Klassifizierung   | EN 717-1                       |
| <b>Acoustic insulation</b> / Efficacité acoustique - Kontaktgeluidisolatie - Trittschallverbesserungsmaß                                      | EN ISO 717-2<br>EN ISO 10140-3 |
| <b>Acoustic insulation</b> / Efficacité acoustique - Kontaktgeluidisolatie - Trittschallverbesserungsmaß <b>+ Xtrafloor Flex Pro underlay</b> | EN ISO 717-2                   |
| <b>Castor chair resistance</b> / Résistance aux chaises à roulettes - Bestand tegen stoelwielen - Stuhlrollenfestigkeit                       | EN ISO 4918                    |
| <b>Stain resistance</b> / Résistance aux taches - Vlekbestendigheid - Fleckenbeständigkeit  | EN ISO 26987                   |
| <b>Light fastness</b> / Résistance à la lumière - Lichtechtheid - Lichtechtheit   | EN ISO 105-B02                 |
| <b>Underfloor heating</b> / Chauffage par le sol - Vloerverwarming - Bodenheizung   | EN 12524                       |
| <b>Warranty years</b> / Garantie ans - Garantie jaren - Garantie Jahren   | -                              |
| <b>UPEC Classification</b> / Classement UPEC - UPEC-classificatie - UPEC-Klassifizierung  | QB 30                          |
| <b>N°certificat QB UPEC</b>   | QB 30                          |

| Studio Moods                                      | Moduleo 55 Herringbone                             | Moduleo 55 Expressive                   | Moduleo 55 Impressive                   | Moduleo 55 Woods                        |
|---|--|---|---|---|
| 23 - 33 - 42                                      | 23 - 33 - 42                                       | 23 - 33 - 42                            | 23 - 33 - 42                            | 23 - 33 - 42                            |
| 2,50 mm   | 2,50 mm  | 2,50 mm                                 | 2,50 mm                                 | 2,50 mm                                 |
| 0,55 mm   | 0,55 mm  | 0,55 mm                                 | 0,55 mm                                 | 0,55 mm                                 |
| Protectonite®                                     | Protectonite®                                      | Protectonite®                           | Protectonite®                           | Protectonite®                           |
| 4059  | 4059   | 4059                                    | 4059                                    | 4059                                    |
| According to design                               | -  | Yes                                     | Yes                                     | -                                       |
| <b>Small Plank:</b> 261,33 x 65,33 mm             | <b>Parallelogram:</b> 452,64 x 196 mm              | 15,8 x 63,2 cm                          | 19,6 x 132 cm                           | 19,6 x 132 cm                           |
| <b>Chevron:</b> 522,67 x 92,40 mm                 | <b>Big Diamond:</b> 226,32 x 392 mm                | -                                       | -                                       | 21,4 x 149,8 cm                         |
| <b>Hexagon:</b> 226,32 x 196 mm                   | <b>Trapezoid:</b> 452,64 x 196 mm                  | -                                       | 24,6 x 149,8 cm                         | 15,8 x 63,2 cm                          |
| <b>Diamond:</b> 113,16 x 196 mm                   | <b>Big Hexagon:</b> 452,64 x 392 mm                | -                                       | -                                       | 32,9 x 65,9 cm                          |
| <b>Triangle:</b> 452,64 x 392 mm                  |  | -                                       | 49,3 x 49,3 cm                          | -                                       |
|   |  | -                                       | -                                       | 43,4 x 86,8 cm                          |
|   |  | -                                       | -                                       | -                                       |
|   |  | -                                       | -                                       | -                                       |
| <b>Small Plank:</b> 116 pcs - 1,98 m <sup>2</sup> | <b>Parallelogram:</b> 17 pcs - 1,51 m <sup>2</sup> | 24 pcs - 2,4 m <sup>2</sup>             | 14 pcs - 3,62 m <sup>2</sup>            | 14 pcs - 3,62 m <sup>2</sup>            |
| <b>Chevron:</b> 42 pcs - 2,03 m <sup>2</sup>      | <b>Big Diamond:</b> 51 pcs - 2,26 m <sup>2</sup>   | -                                       | -                                       | 10 pcs - 3,21 m <sup>2</sup>            |
| <b>Hexagon:</b> 44 pcs - 1,46 m <sup>2</sup>      | <b>Trapezoid:</b> 34 pcs - 2,26 m <sup>2</sup>     | -                                       | 10 pcs - 3,69 m <sup>2</sup>            | 24 pcs - 2,40 m <sup>2</sup>            |
| <b>Diamond:</b> 132 pcs - 1,46 m <sup>2</sup>     | <b>Big Hexagon:</b> 17 pcs - 2,26 m <sup>2</sup>   | -                                       | -                                       | 16 pcs - 3,47 m <sup>2</sup>            |
| <b>Triangle:</b> 17 pcs - 1,51 m <sup>2</sup>     |  | -                                       | 14 pcs - 3,40 m <sup>2</sup>            | -                                       |
|   |  | -                                       | -                                       | 10 pcs - 3,77 m <sup>2</sup>            |
|   |  | -                                       | -                                       | -                                       |
| Bfl-S1  | Bfl-S1   | Bfl-S1                                  | Bfl-S1                                  | Bfl-S1                                  |
| Class T   | Class T  | Class T                                 | Class T                                 | Class T                                 |
| ≤ 400 mm: ≤ 0,25 mm<br>> 400 mm: ≤ 0,35 mm        | ≤ 0,35 mm  | ≤ 0,35 mm                               | ≤ 0,35 mm                               | ≤ 0,35 mm                               |
| DS  | DS   | DS                                      | DS                                      | DS                                      |
| R10   | R10  | R9 / R10                                | R9 / R10                                | R10                                     |
| Norm: ≤ 0,10 mm<br>0,03 mm                        | Norm: ≤ 0,10 mm<br>0,03 mm                         | Norm: ≤ 0,10 mm<br>0,03 mm              | Norm: ≤ 0,10 mm<br>0,03 mm              | Norm: ≤ 0,10 mm<br>0,03 mm              |
| No cracks, no damage                              | No cracks, no damage                               | No cracks, no damage                    | No cracks, no damage                    | No cracks, no damage                    |
| ≤ 2 mm  | ≤ 2 mm   | ≤ 2 mm                                  | ≤ 2 mm                                  | ≤ 2 mm                                  |
| ≤ 10 <sup>9</sup> Ohm                             | ≤ 10 <sup>9</sup> Ohm                              | ≤ 10 <sup>9</sup> Ohm                   | ≤ 10 <sup>9</sup> Ohm                   | ≤ 10 <sup>9</sup> Ohm                   |
| Norm: ≤ 0,25 %<br>≤ 0,05%                         | Norm: ≤ 0,25 %<br>≤ 0,05%                          | Norm: ≤ 0,25 %<br>≤ 0,05%               | Norm: ≤ 0,25 %<br>≤ 0,05%               | Norm: ≤ 0,25 %<br>≤ 0,05%               |
| 0,25 w/(m.K)                                      | 0,25 w/(m.K)                                       | 0,25 w/(m.K)                            | 0,25 w/(m.K)                            | 0,25 w/(m.K)                            |
| 0,01 m <sup>2</sup> . K/W                         | 0,01 m <sup>2</sup> . K/W                          | 0,01 m <sup>2</sup> . K/W               | 0,01 m <sup>2</sup> . K/W               | 0,01 m <sup>2</sup> . K/W               |
| < 2 kV  | < 2 kV   | < 2 kV                                  | < 2 kV                                  | < 2 kV                                  |
| E1  | E1   | E1                                      | E1                                      | E1                                      |
| 3 dB  | 3 dB   | 3 dB                                    | 3 dB                                    | 3 dB                                    |
| -   | -  | -                                       | -                                       | -                                       |
| 10 dB   | 10 dB  | 10 dB                                   | 10 dB                                   | 10 dB                                   |
| No damage to wearlayer, no delamination           | No damage to wearlayer, no delamination            | No damage to wearlayer, no delamination | No damage to wearlayer, no delamination | No damage to wearlayer, no delamination |
| Very good   | Very good  | Very good                               | Very good                               | Very good                               |
| ≥ 6   | ≥ 6  | ≥ 6                                     | ≥ 6                                     | ≥ 6                                     |
| Suitable, max 27°C                                | Suitable, max 27°C                                 | Suitable, max 27°C                      | Suitable, max 27°C                      | Suitable, max 27°C                      |
| 10  | 10   | 10                                      | 10                                      | 10                                      |
| -   | -  | U3P3E2C2                                | U3P3E2C2                                | U3P3E2C2                                |
| -   | 345-010.1  | 345-010.1                               | 345-010.1                               | 345-010.1                               |

The warranty covers manufacturing defects and premature wear in the event of normal use / La garantie couvre les vices de fabrication et l'usure précoce en usage normal

De Garantie dekt Herstellungsfehler und vorzeitigen Verschleiß bei normaler Nutzung | De garantie dekt fabricagefouten en voortijdig afslijten bij normaal gebruik



## Technical Specifications

Spécifications techniques - Technische specificaties - Technische Spezifikationen

|  |                                |
|--|--------------------------------|
| <b>Level of use</b> / Classe d'usage - Gebruiksklasse - Eignungsklasse   | EN ISO 10874                   |
| <b>Total thickness</b> / Epaisseur totale - Totale dikte - Gesamtdicke   | EN ISO 24346                   |
| <b>Wear layer</b> / Couche d'usure - Slijtlaag - Nuttschicht   | EN ISO 24340                   |
| <b>Wear layer PUR treatment</b> / Traitement polyurethane - PUR slijtlaag behandeling - Schutz vor Schmutz PUR   | -                              |
| <b>Total weight g/m<sup>2</sup></b> / Poids total g/m <sup>2</sup> - Totaal gewicht g/m <sup>2</sup> - Flächengewicht g/m <sup>2</sup>   | EN ISO 23997                   |
| <b>Embossed in register</b> / Grainage en rapport - Register embossing - Synchronprägung   | -                              |
| <b>Planks A</b> / Lames A - Planken A - Dielen A   | EN ISO 24342                   |
| <b>Planks B</b> / Lames B - Planken B - Dielen B   | EN ISO 24342                   |
| <b>Planks C</b> / Lames C - Planken C - Dielen C   | EN ISO 24342                   |
| <b>Tiles A</b> / Dalles A - Tegels A - Fliesen A   | EN ISO 24342                   |
| <b>Tiles B</b> / Dalles B - Tegels B - Fliesen B   | EN ISO 24342                   |
| <b>Tiles C</b> / Dalles C - Tegels C - Fliesen C   | EN ISO 24342                   |
| <b>Tiles D</b> / Dalles D - Tegels D - Fliesen D   | EN ISO 24342                   |
| <b>Box planks A</b> / Boîte de lames A - Doos planken A - Ein Karton Dielen A  | -                              |
| <b>Box planks B</b> / Boîte de lames B - Doos planken B - Ein Karton Dielen B  | -                              |
| <b>Box planks C</b> / Boîte de lames C - Doos planken C - Ein Karton Dielen C  | -                              |
| <b>Box tiles A</b> / Boîte de dalles A - Doos tegels A - Ein Karton Fliesen A  | -                              |
| <b>Box tiles B</b> / Boîte de dalles B - Doos tegels B - Ein Karton Fliesen B  | -                              |
| <b>Box tiles C</b> / Boîte de dalles C - Doos tegels C - Ein Karton Fliesen C  | -                              |
| <b>Box tiles D</b> / Boîte de dalles D - Doos tegels D - Ein Karton Fliesen D  | -                              |
| <b>Inflammability</b> / Classement feu - Brandklasse - Brandverhalten  | EN 13501                       |
| <b>Scratch resistance</b> / Résistance aux rayures - Kravastheid - Verschleißverhalten   | EN ISO 660-2                   |
| <b>Squareness &amp; straightness</b> / Rectitude des arrêtes et de l'équerrage - Rechtheid & rechthoekigheid - Maßstabilität   | EN ISO 24342                   |
| <b>Slip resistance</b> / Glissance - Antislip - Rutschfest   | EN 13893                       |
| <b>Slip restraint</b> / Résistance au glissement - Slipweerstand - Rutschhemmung   | DIN 51130                      |
| <b>Residual indentation average measured value</b> / Poinçonnement rémanent - Restindruk - Eindrückverhalten / valeur moyenne mesurée - gemiddelde gemeten waarde - durchschnittlich gemessener Wert | EN ISO 24343-1                 |
| <b>Furniture leg resistance</b> / Résistance au pied du meuble - Meubelpoottest - Möbelschubtest   | EN ISO 16581                   |
| <b>Curling</b> / Incurvation - Krulling - Schüsselung  | EN ISO 23999                   |
| <b>Electrical resistance</b> / Résistance électrique - Elektrische weerstand - Elektrischer Widerstand   | EN 1081                        |
| <b>Dimensional stability</b> / Stabilité dimensionnelle - Dimensionele stabiliteit - Massänderung  | EN ISO 23999                   |
| <b>Heat insulation</b> / Isolation thermique - Thermische isolatie - Wärmeleitfähigkeit  | EN ISO 10456                   |
| <b>Thermal resistance R</b> / Résistance thermique R - Warmtedoorlaatweerstand R - Wärmedurchlasswiderstand R  | EN 12664                       |
| <b>Electrostatic performance</b> / Accumulation de charges électrostatiques - Electrostatische propensiteit - Antistatit   | EN 1815                        |
| <b>Formaldehyde group</b> / Classe formaldéhyde - Formaldehydekategorie - Formaldehyd Klassifizierung  | EN 717-1                       |
| <b>Acoustic insulation</b> / Efficacité acoustique - Kontaktgeluidisolatie - Trittschallverbesserungsmaß   | EN ISO 717-2<br>EN ISO 10140-3 |
| <b>Acoustic insulation</b> / Efficacité acoustique - Kontaktgeluidisolatie - Trittschallverbesserungsmaß <b>+ Xtrafloor Flex Pro underlay</b>  | EN ISO 717-2                   |
| <b>Castor chair resistance</b> / Résistance aux chaises à roulettes - Bestand tegen stoelwielen - Stuhlrollenfestigkeit  | EN ISO 4918                    |
| <b>Stain resistance</b> / Résistance aux taches - Vlekbestendigheid - Fleckenbeständigkeit   | EN ISO 26987                   |
| <b>Light fastness</b> / Résistance à la lumière - Lichtechtheid - Lichtechtheit  | EN ISO 105-B02                 |
| <b>Underfloor heating</b> / Chauffage par le sol - Vloerverwarming - Bodenheizung  | EN 12524                       |
| <b>Warranty years</b> / Garantie ans - Garantie jaren - Garantie Jahren  | -                              |
| <b>UPEC Classification</b> / Classement UPEC - UPEC-classificatie - UPEC-Klassifizierung   | QB 30                          |
| <b>N°certificat QB UPEC</b>  | QB 30                          |

The warranty covers manufacturing defects and premature wear in the event of normal use / La garantie couvre les vices de fabrication et l'usure précoce en usage normal



| Moduleo 55 Tiles                                 | Moduleo 40                                 | Matrix 70 Loose Lay                        | LayRed 55 Impressive                       | LayRed 55                                  |
|--|--|--|--|--|
| 23 - 33 - 42                                     | 23 - 32                                    | 23 - 34 - 43                               | 23 - 33                                    | 23 - 33                                    |
| 2,50 mm  | 2,35 mm                                    | 5 mm                                       | 6 mm                                       | 6 mm                                       |
| 0,55 mm  | 0,40 mm                                    | 0,7 mm                                     | 0,55 mm                                    | 0,55 mm                                    |
| Protectonite®                                    | Protectonite®                              | Superguard                                 | Twinguard®                                 | Twinguard®                                 |
| 4059   | 3821                                       | 8400                                       | 8987                                       | 8987                                       |
| -  | -  | -  | Yes  | -  |
| 15,8 x 63,2 cm                                   | 19,6 x 132 cm                              | 17,78 x 121,92 cm                          | 20,9 x 149,4 cm                            | 18,9 x 131,7cm                             |
| -  | -  | -  | -  | -  |
| -  | -  | -  | -  | -  |
| 32,9 x 65,9 cm                                   | 32,9 x 65,9 cm                             | 50 x 50 cm                                 | -  | 61,0 x 30,3 cm                             |
| 49,3 x 49,3 cm                                   | -  | 45,72 x 91,44 cm                           | -  | -  |
| 43,4 x 86,8 cm                                   | -  | -  | -  | -  |
| 60,96 x 60,96 cm                                 | -  | -  | -  | -  |
| 24 pcs - 2,40 m <sup>2</sup>                     | 15 pcs - 3,88 m <sup>2</sup>               | 10 pcs - 2,17 m <sup>2</sup>               | 6 pcs - 1,87 m <sup>2</sup>                | 8 pcs - 1,99 m <sup>2</sup>                |
| -  | -  | -  | -  | -  |
| -  | -  | -  | -  | -  |
| 16 pcs - 3,47 m <sup>2</sup>                     | 18 pcs - 3,9 m <sup>2</sup>                | 8 pcs - 2,00 m <sup>2</sup>                | -  | 10 pcs - 1,85 m <sup>2</sup>               |
| 14 pcs - 3,40 m <sup>2</sup>                     | -  | 6 pcs - 2,51 m <sup>2</sup>                | -  | -  |
| 10 pcs - 3,77 m <sup>2</sup>                     | -  | -  | -  | -  |
| 10 pcs - 3,72 m <sup>2</sup>                     | -  | -  | -  | -  |
| Bfl-S1   | Bfl-S1                                     | Bfl-S1                                     | Bfl-S1                                     | Bfl-S1                                     |
| Class T  | Class T                                    | Type I                                     | Class T                                    | Class T                                    |
| ≤ 0,25 mm (Tiles B)<br>≤ 0,35 mm (Tiles A, C, D) | ≤ 0,35 mm                                  | ≤ 0,35 mm                                  | ≤ 0,20 mm<br>≤ 0,30 mm                     | ≤ 0,20 mm / ≤ 0,30 mm                      |
| DS   | DS   | DS   | DS   | DS   |
| R10  | R10  | R9 / R10                                   | R10  | R10  |
| Norm: ≤ 0,10 mm<br>0,03 mm                       | Norm: ≤ 0,10 mm<br>0,03 mm                 | Norm: ≤ 0,10 mm                            | Norm: ≤ 0,10 mm                            | Norm: ≤ 0,10 mm                            |
| No cracks, no damage                             | No cracks, no damage                       | No cracks, no damage                       | No cracks, no damage                       | No cracks, no damage                       |
| ≤ 2 mm   | ≤ 2 mm                                     | ≤ 2 mm                                     | ≤ 1 mm                                     | ≤ 1 mm                                     |
| ≤ 10 <sup>9</sup> Ohm                            | ≤ 10 <sup>9</sup> Ohm                      | ≤ 10 <sup>9</sup> Ohm                      | -  | -  |
| Norm: ≤ 0,25%<br>≤ 0,05%                         | Norm: ≤ 0,25%<br>≤ 0,05%                   | ≤ 0,10%                                    | Norm: ≤ 0,25%<br>≤ 0,05%                   | Norm: ≤ 0,25%<br>≤ 0,05%                   |
| 0,25 w/(m.K)                                     | 0,25 w/(m.K)                               | 0,25 w/(m.K)                               | -  | -  |
| 0,01 m <sup>2</sup> . K/W                        | 0,01 m <sup>2</sup> . K/W                  | 0,0223 m <sup>2</sup> . K/W                | 0,016 m <sup>2</sup> . K/W                 | 0,016 m <sup>2</sup> . K/W                 |
| < 2 kV   | < 2 kV                                     | -  | -  | -  |
| E1   | E1   | E1   | E1   | E1   |
| 3 dB   | 3 dB                                       | 8 dB                                       | -  | -  |
| -  | -  | -  | Up to 22dB / 10dB ΔLin                     | Up to 22dB / 10dB ΔLin                     |
| 10 dB  | 10 dB                                      | 15 dB                                      | -  | -  |
| No damage to wearlayer,<br>no delamination       | No damage to wearlayer,<br>no delamination | No damage to wearlayer,<br>no delamination | No damage to wearlayer,<br>no delamination | No damage to wearlayer,<br>no delamination |
| Very good  | Very good                                  | Good                                       | Very good                                  | Very good                                  |
| ≥ 6  | ≥ 6  | ≥ 6  | ≥ 6  | ≥ 6  |
| Suitable, max 27°C                               | Suitable, max 27°C                         | Suitable, max 27°C                         | Suitable, max 27°C                         | Suitable, max 27°C                         |
| 10   | 7  | 10   | 10   | 10   |
| U3P3E2C2   | U3P2E2C2                                   | -  | -  | -  |
| 345-010.1  | 345-011.2                                  | -  | -  | -  |

Die Garantie deckt Herstellungsfehler und vorzeitigen Verschleiß bei normaler Nutzung | De garantie dekt fabricagefouten en voortijdig afslijten bij normaal gebruik

LRV: Light Reflectance Value

Photographic images are not representative due to variations in colour printing. The representative samples shown are sectional definitions. For full design representation, please visit the website.

